


# Leica DISTO™ D5

## Technical Data Leica DISTO™ D5

Typical Measuring Accuracy	± .06 inches
Range	0.16 ft - 650 ft
Power Range Technology™	Yes
Distance in feet Diameter of Laser Dot in inches	33 ft, 167ft, 328 ft 0.2", 1.8", 2.36"
Minimum/Maximum Measurements	Yes
Continuous Measurements	Yes
Addition/Subtraction	Yes
Area/Volume Measurements	Yes
Room Calculation	Yes
Pythagoras Calculation	Yes
Tilt Sensor Horizontal Dist.	Yes
Tilt Sensor	
Measuring Range	±45°
Accuracy to Laser Beam	±0.3°
Accuracy to Housing	±0.3°
Tilt Sensor display units	±0.0°, 0.00%, mm/m, in/ft
4 Folder Digital Viewfinder	Yes
Store Constant Value	1
Recall Last Values	20
Time Delay Release	Yes
Display illumination	Yes
Measuring Units	0.0000m, 0.000m, 0.00m, 0.00 ft, 0' 0" 1/32, 0.00", 0 1/32", 0.000 yds
Measurements Per set of Batteries	Up to 5,000
Multi-functional End Piece	Automatic
Tripod Thread	Yes
Batteries	Typically AA 2 x 1.5v
Spray proof/dust protected IP 54	Yes
Dimensions	5.65"x2.12"x1.18"
Weight with batteries	6.88 oz

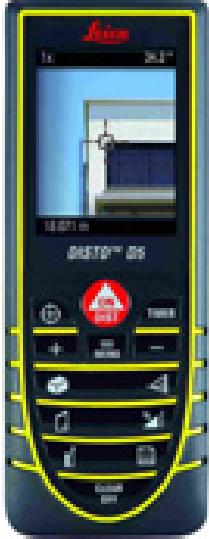

Warranty 24 months as of the date of purchase. Extended warranty 36 months on instrument after being registered with Leica Geosystems within eight (8) weeks of purchase.

All illustration, descriptions, technical specifications and prices are subject to change without notice.

JMA is a trademark of JMA Technology. All Trademarks, Trade Names or logos are property of their respective owners. Disto\_D5\_Specification\_Version\_1\_00\_00\_20090424.ppp

**JMA TECHNOLOGY, INC.**  
 6210 Skyline Drive  
 Houston, Texas 77057  
 Tel: 713-780-7262 Fax: 713-780-3010  
<http://www.jmatech.com>